Air King Ventilation Products®

SPECIFICATIONS

EWF-180

EXHAUST FANS

180 CFM/6.5 SONES @ 0.03" WG. -HVI CERTIFIED
120 Volts, .80 amps, 60 hz.

- **Grill**
  White polymeric grill, dimensions - 11½" x 11½".
- **Blower Wheel**
  Axial Fan Blade — plastic 7.5" Diameter 10 paddle.
- **Motor**
  Heavy duty, permanently split capacitor, plug-in, 4 pole motor, life time lubrication, thermally protected. Rated 120 volts, 60 hz., 0.80 amps.
- **Fan Housing**
  Rugged heavy gage steel housing finished with electro-statically applied epoxy paint stands up to UV light, water, and temperature extremes.
- **Duct**
  Metal 8" round duct, vents directly to outside, includes springloaded aluminum backdraft damper.
- **Unit Mounting**
  Exterior wall mounting eliminates the need for ductwork by venting directly outdoors and can be installed in walls 4" to 9" thick.
- **Ventilating Area**
  For rooms up to 225 sq. ft.
- **Single Pack Shipping Info**
  Box Dim: 19¼" x 15½" x 10½"
  UPC: 0-8316221801-8
  Shipping Weight: 13.7 lbs.

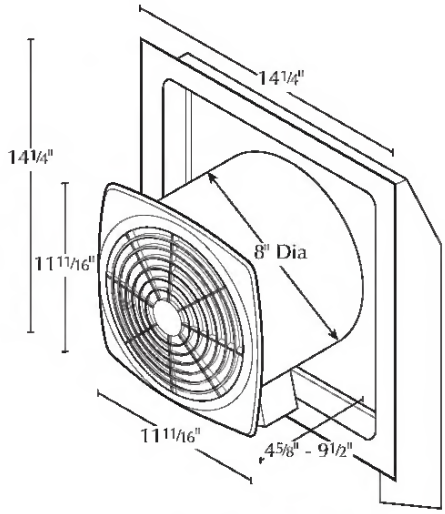

CUL/HVI

PERFORMANCE

	Static Pressure (inches of w.g.)								*HVI Sones @ .1 SP*	*Fan Speed RPM*	*Power Watts*
	0	0.03	0.1	0.15	0.2	0.25	0.3	0.35			
Air Flow - CFM	193	180	157	147	139	134	131	128	6.5	2200	80

PROJECT		**ARCHITECT**	
LOCATION		**ENGINEER**	
CONTRACTOR		**SUBMITTED BY**	**DATE**

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 ¥ 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine